


TRÆF DET RIGTIGE VALG



BAS KRANER



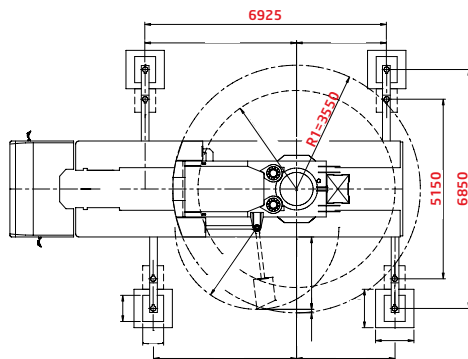

- 44 meter udlæg
- Max last 8 ton på 12,8 meter.
- Løftekapacitet 1900 kg på 44 meter udlæg
- Max løftehøjde 46 meter med jibben vippet op i 30 grader.

44 m

LIFTING CHART outrigger support base 6,925 m x 6,85 m up to wind force 8 on the Beaufort scale (17 m/sec)

Jib horizontal


Hook height 25,3 m (height under the jib 27,3 m)

3,5		12,85	15	20	25	30	35	40	44	Radius (m)								
8000		7890	6665	5760	5065	4510	4060	3690	3375	3105	2875	2670	2495	2335	2195	2070	1955	Load (kg)
	8000	7225	6180	5390	4770	4275	3865	3525	3235	2985	2770	2580	2410	2265	2130	2010	1900	

Jib 30° luffed

3,5																11,34	15	20	25	30	35	38,3	Radius (m)
8000	8000	6790	5730	4950	4345	3865	3475	3155	2880	2650	2450	2275	2120	1985	1900	Load (kg)							
	7475	6220	5315	4630	4090	3660	3310	3010	2760	2545	2360	2195	2050	1920									



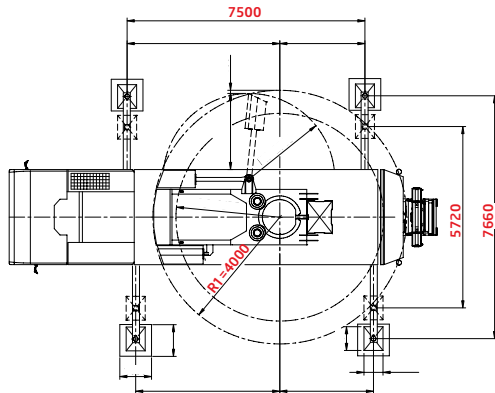


- 50 meter udlæg
- Max last 9 ton på 13 meter.
- Løftekapacitet 1900 kg på 50 meter udlæg
- Max løftehøjde 55 meter med jibben vipet op i 30 grader.


Lifting chart Outrigger support base 7,50 m x 7,66 m

Jib horizontal

Hookheight 23,8 / 32,6 m (height under jib 25,8 / 34,6 m)



Jib 30° luffed



50 m



BAS KRANER A/S

75 75 • 7 • 9 • 13

mail@baskraner.dk

www.baskraner.dk

JYLLAND

FYN

SJÆLLAND